

Radar volcano monitoring system in Iceland

Icelandic Met Office





Pórður Arason (arason@vedur.is), Richard F. Yeo, Hermann Arngrímsson, Bolli Pálason, Sibylle von Löwes, Guðrún Nína Petersen and Halldór Björnsson

Weather radars are valuable instruments in monitoring explosive volcanic eruptions. Temporal variations in the plume and ash dispersal can be monitored and thus eruption strength estimates derived. Radar reflectivity of a volcanic plume is related to the composition, concentration and size-distribution of the complex mixture of ice, water and ash as well as type, shape and orientation of the ash grains.

After the Eyjafjallajökull volcanic eruption in 2010, the radar capabilities in Iceland were greatly increased in cooperation with the International Civil Aviation Organization (ICAO). The Icelandic Meteorological Office (Veðurstofa Íslands), a government institute, now owns and operates four radars that can be utilized for volcano monitoring. In addition to issuing weather forecasts and warnings of natural hazards, the institute is responsible for monitoring and conducting research on meteorology, hydrology, avalanches, glaciology, earthquakes, tectonics and volcanology.


This poster presents detailed technical information on the four radars with examples of the information acquired during previous eruptions. This expanded network of radars is expected to give valuable information on future volcanic eruptions in Iceland.

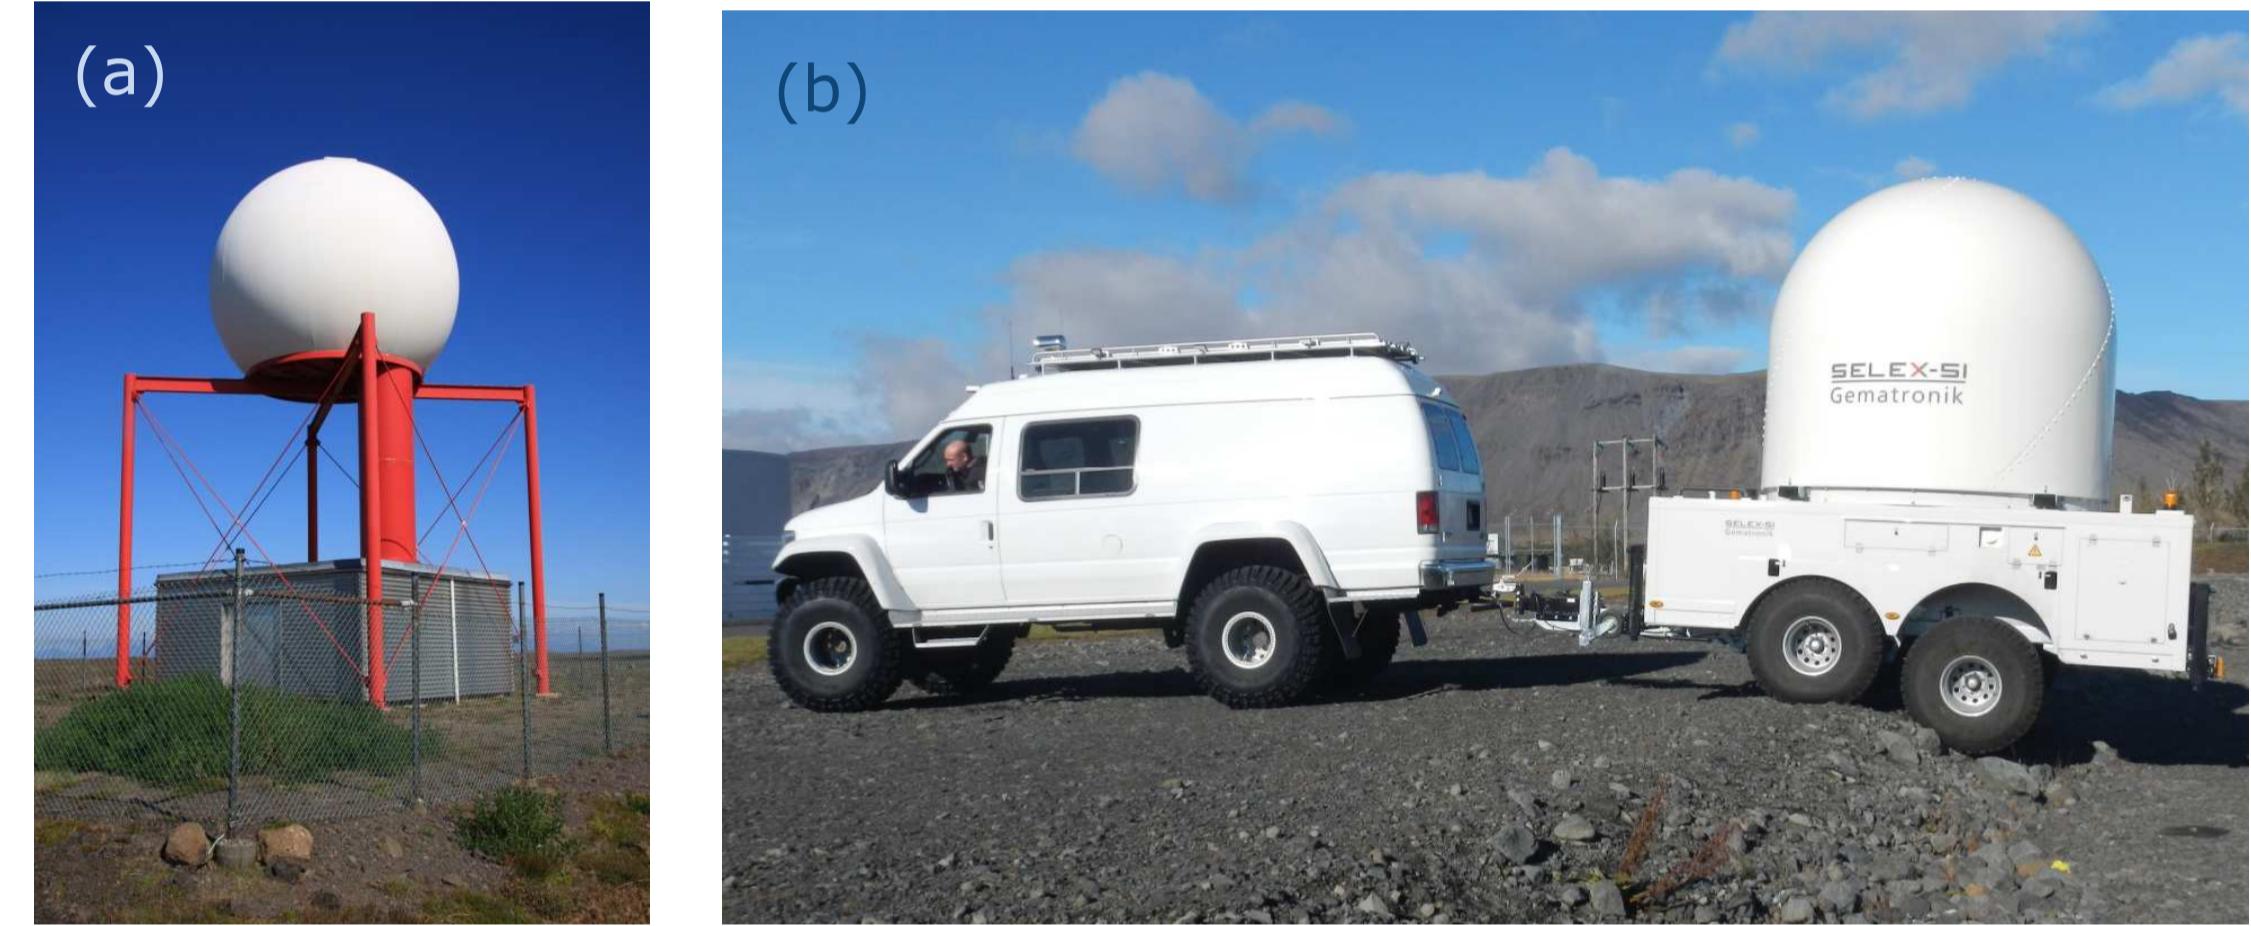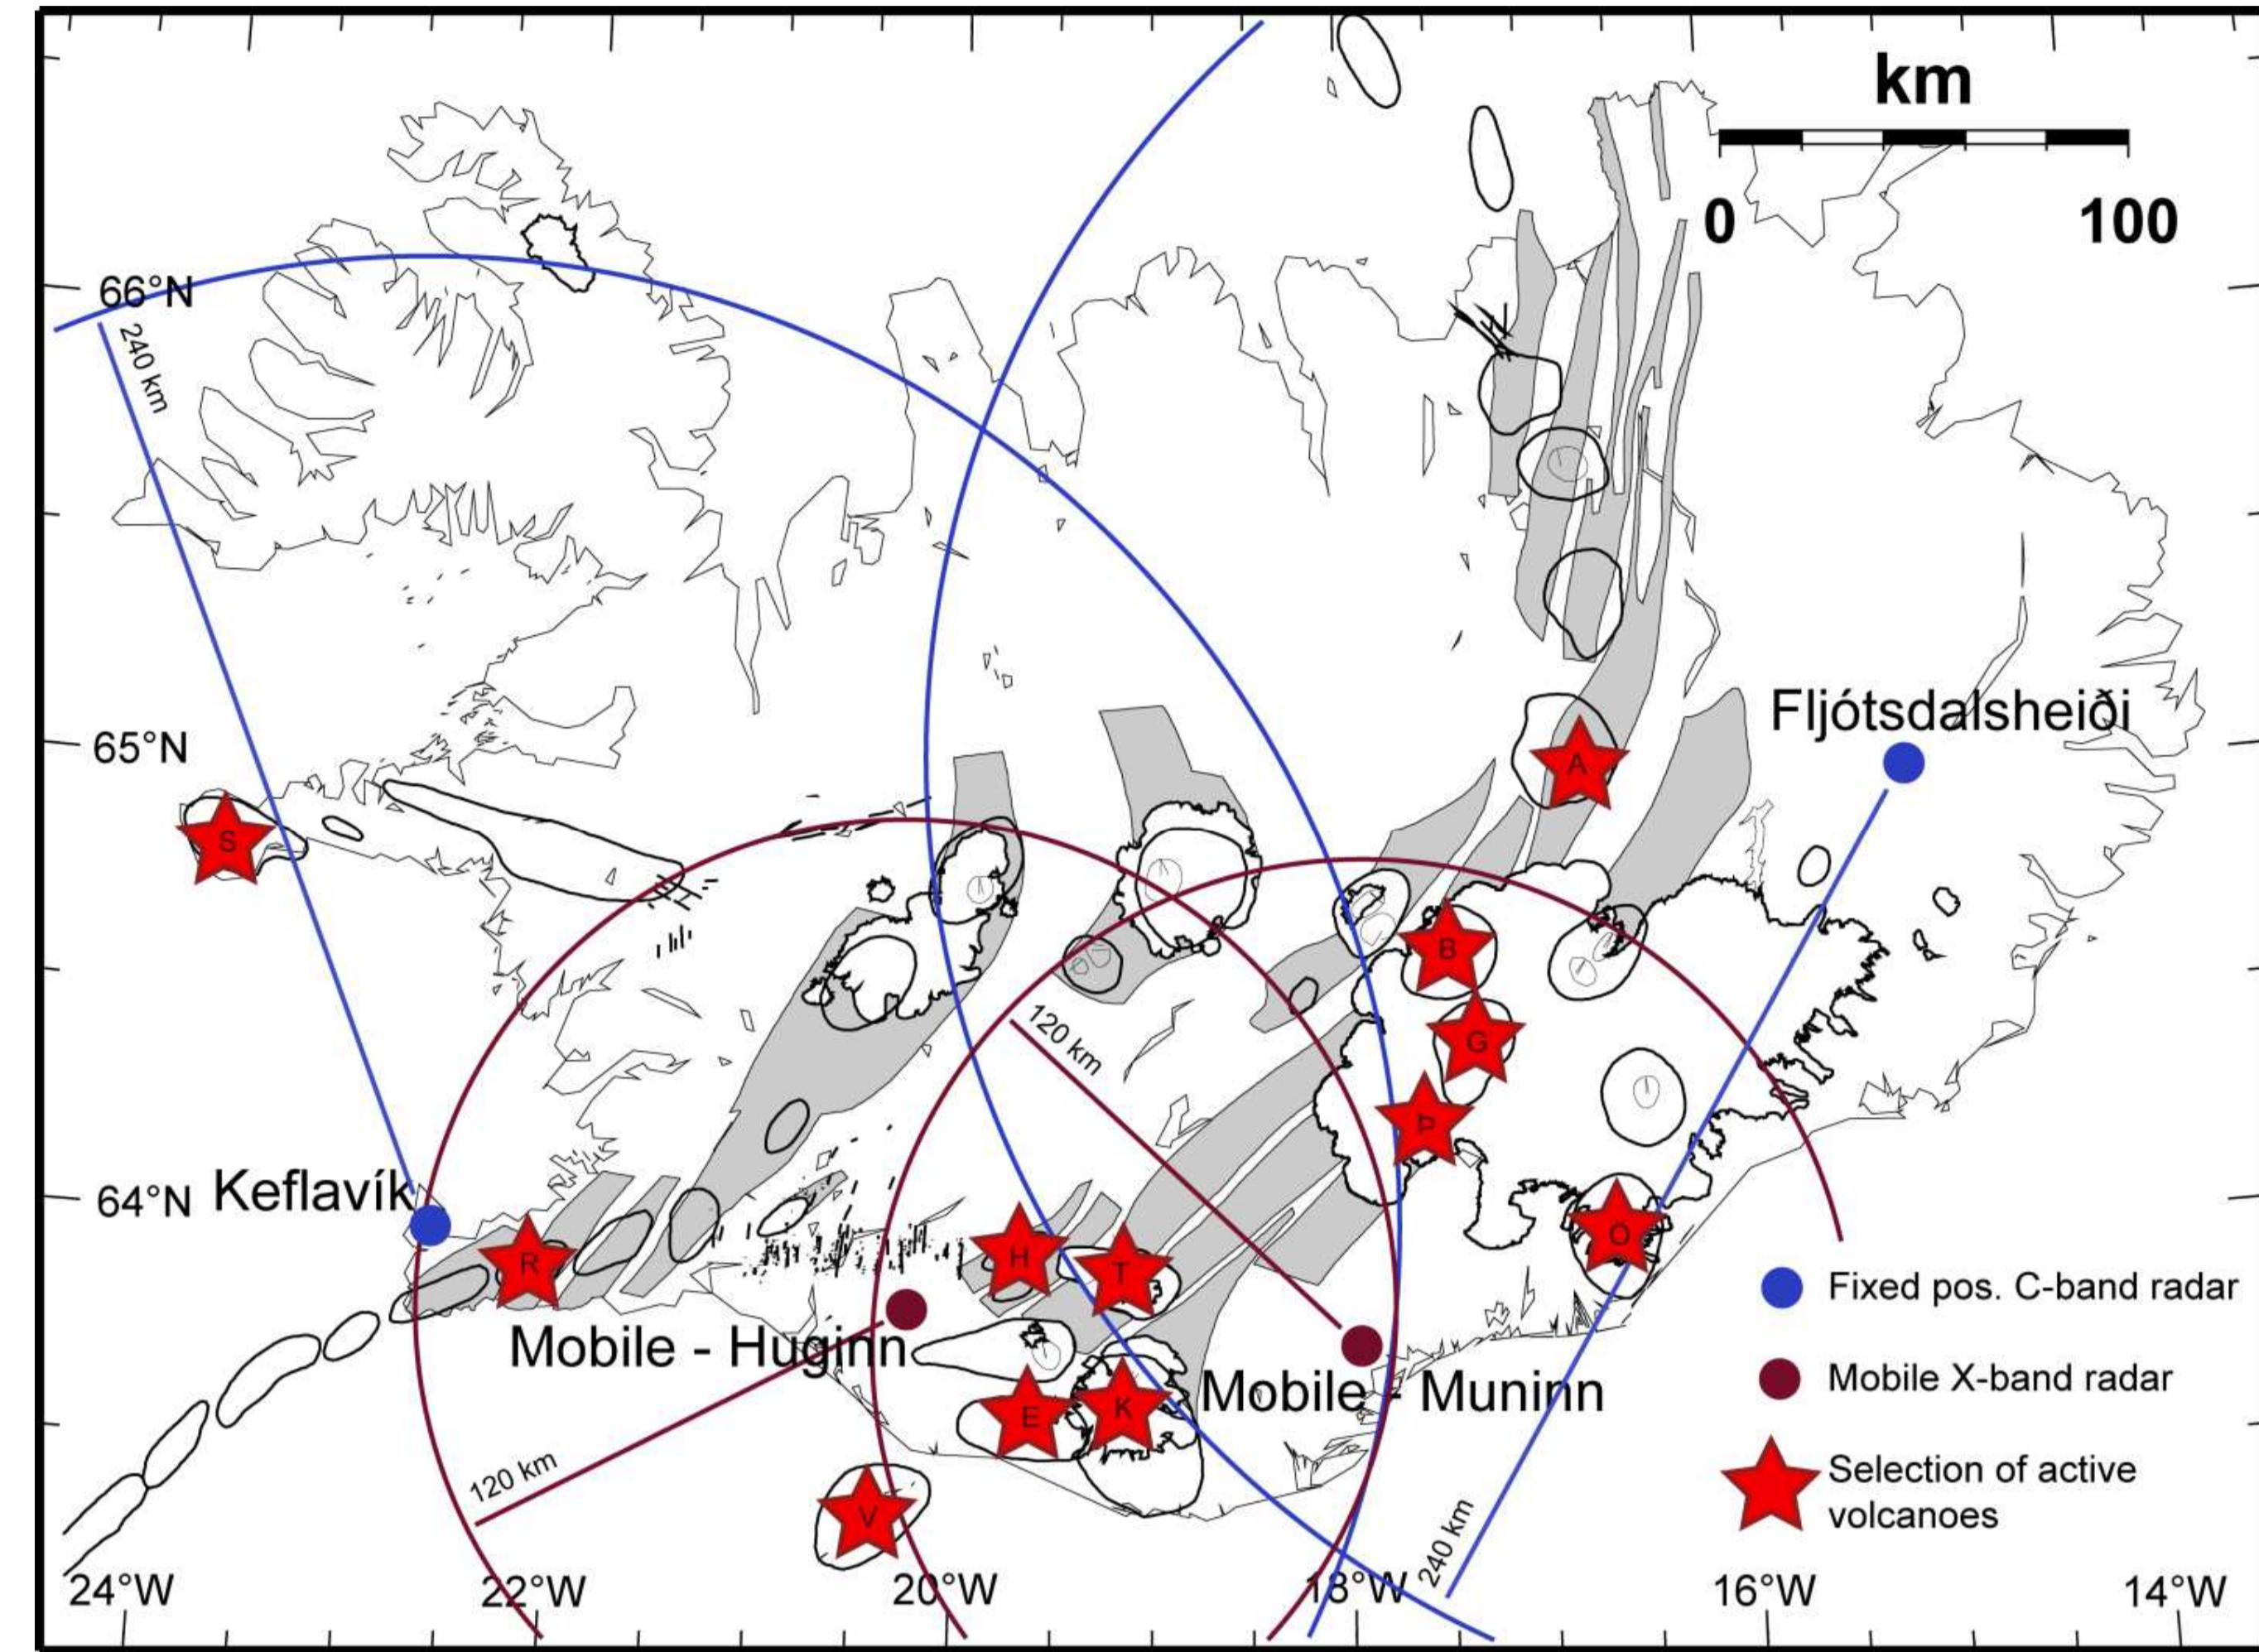


(a) The Keflavík C-band weather radar; (b) Huginn mobile X-band radar; (c) A sample radar reflectivity plot during the Grímsvötn 2011 eruption measured by a mobile radar on loan from the Italian Civil Protection Authorities (Selex Meteor 50DX). Photos Pórður Arason and Geirfunnur S. Sigurðsson.

Table 1 Recent explosive eruptions in Iceland


| Volcano | Initiation | Duration | Explosive phase |
|------------------|---------------|----------|-----------------|
| Grímsvötn | 21 May 2011 | 8 days | 8 days |
| Eyjafjallajökull | 14 April 2010 | 39 days | 29 days |
| Grímsvötn | 1 Nov 2004 | 6 days | 6 days |
| Hekla | 26 Feb 2000 | 12 days | ~12 hours |
| Grímsvötn | 18 Dec 1998 | 10 days | 10 days |
| Gjálp | 30 Sept 1996 | 13 days | 13 days |
| Hekla | 17 Jan 1991 | 53 days | ~10 hours |
| Grímsvötn | 28 May 1983 | few days | very brief |
| Hekla | 9 April 1981 | 8 days | few hours |
| Hekla | 5 May 1970 | 61 days | ~2 hours |

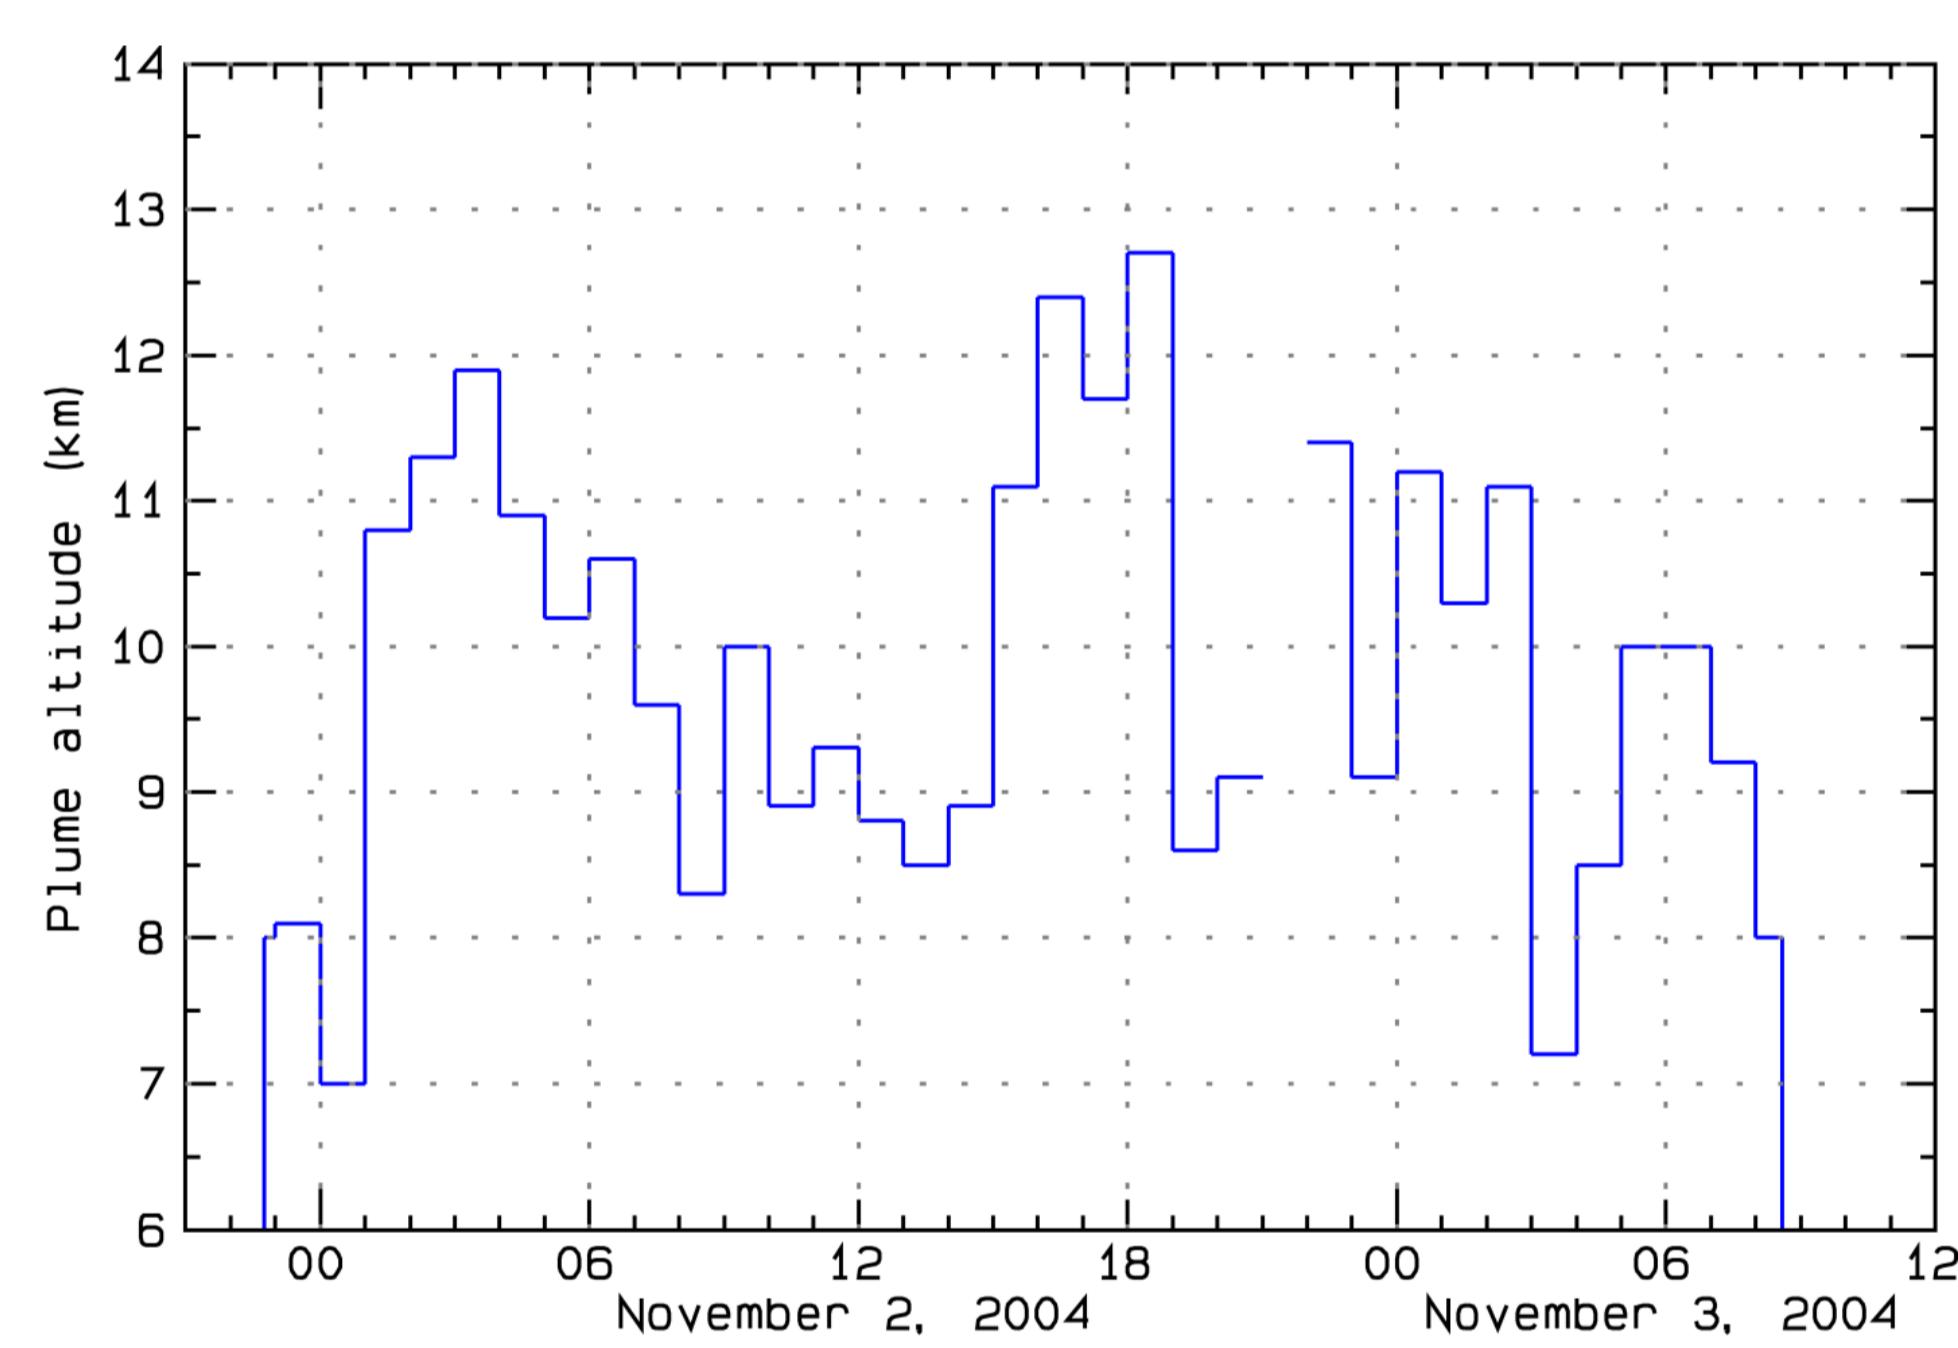

Grímsvötn 2004: Plume-top altitude – 1 hour averages during the initial most powerful 39 hours, 1–3 Nov 2004.

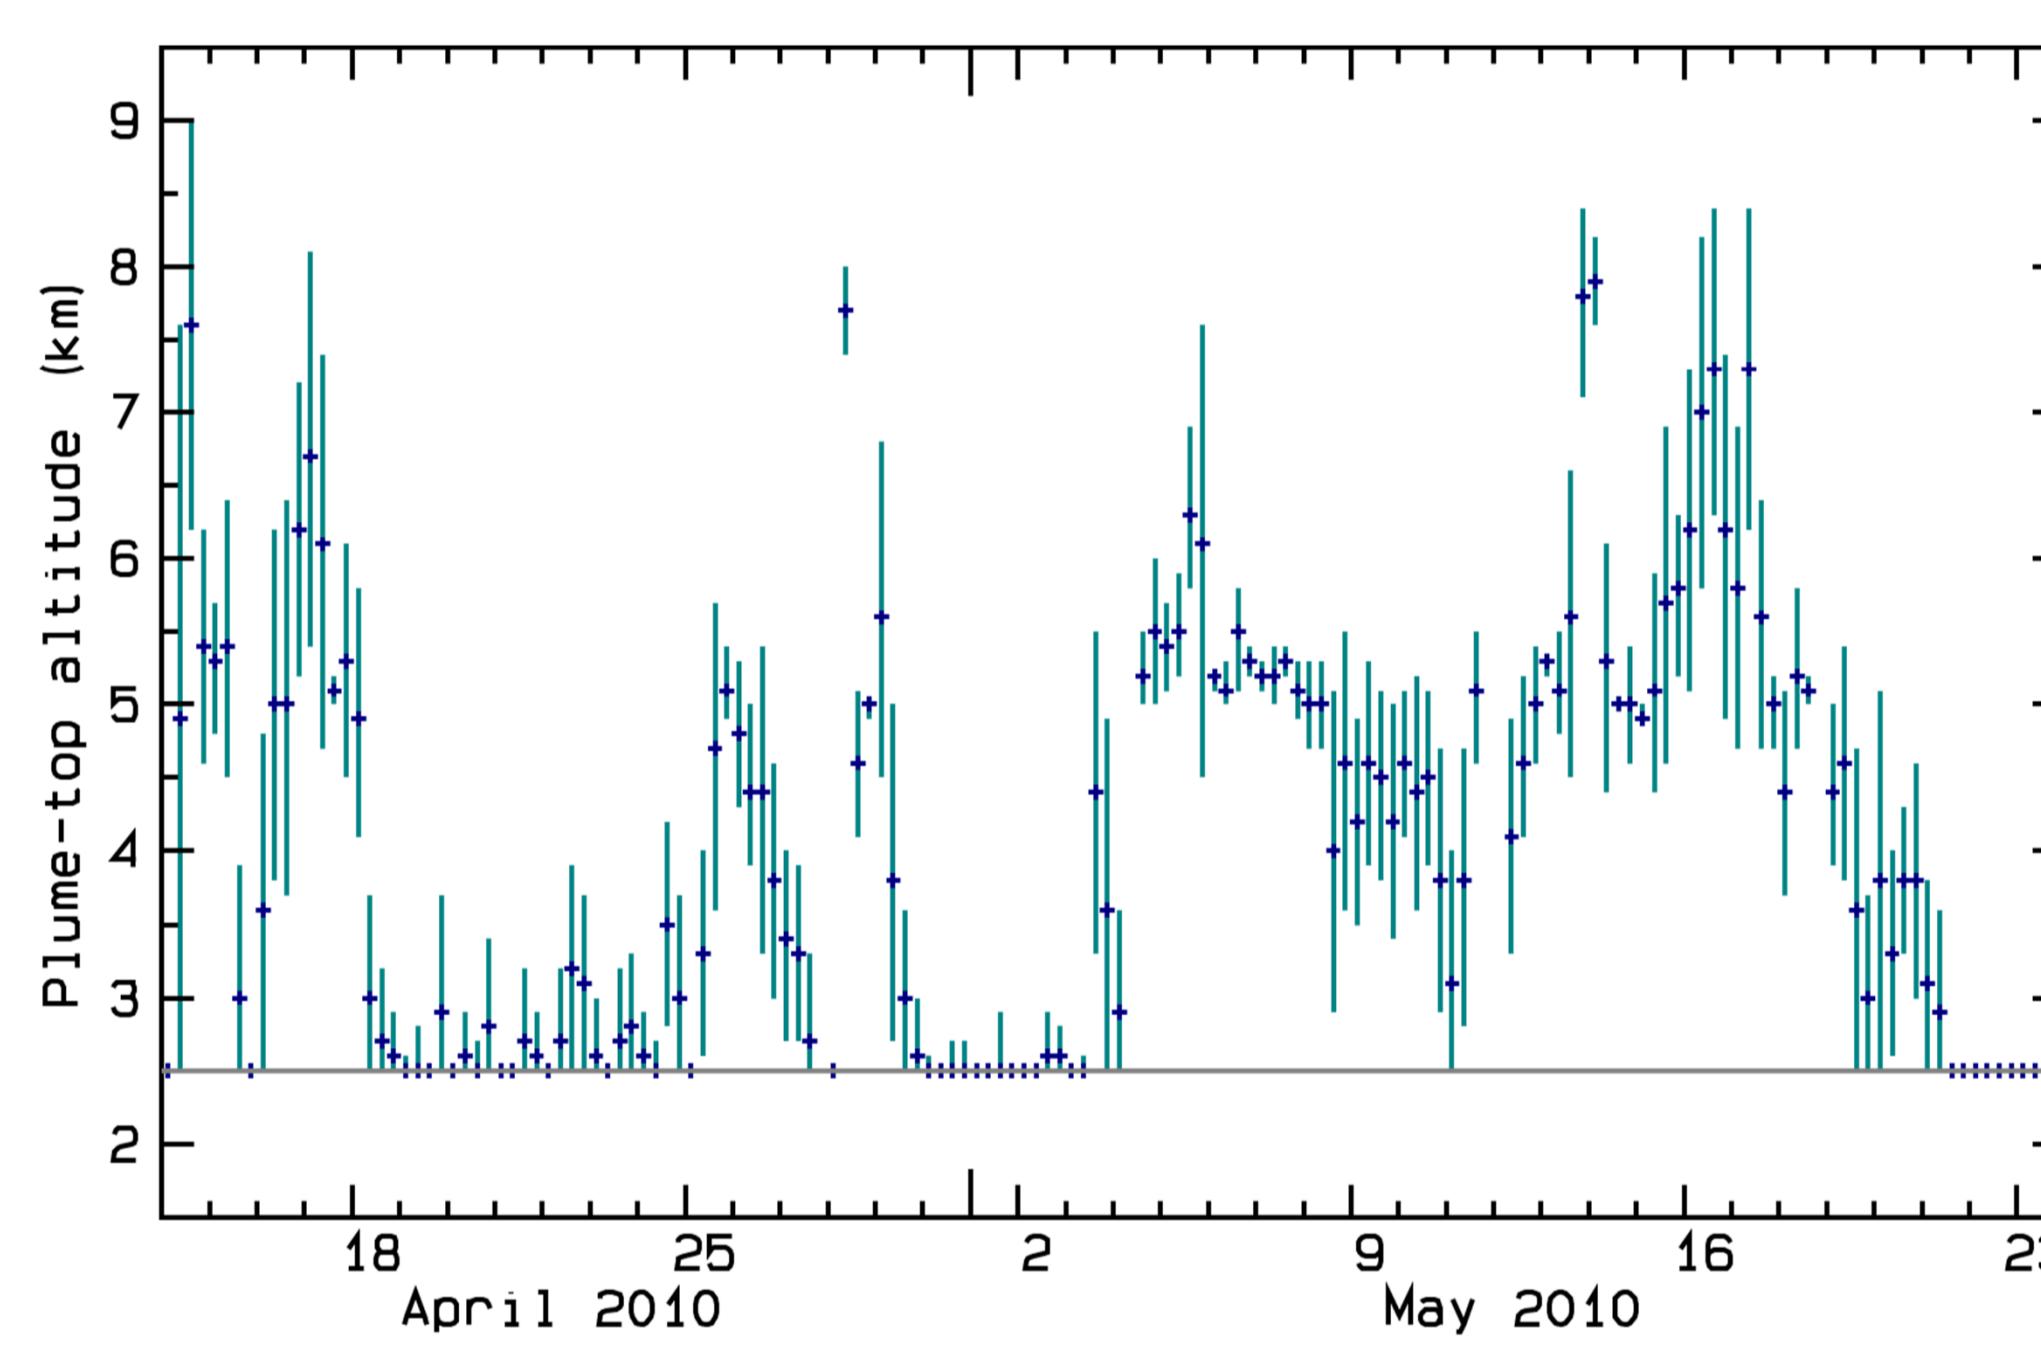

Eyjafjallajökull 2010: Plume-top altitude – 6 hour averages and standard deviation during the 39 days of the eruption, 14 April – 23 May 2010.

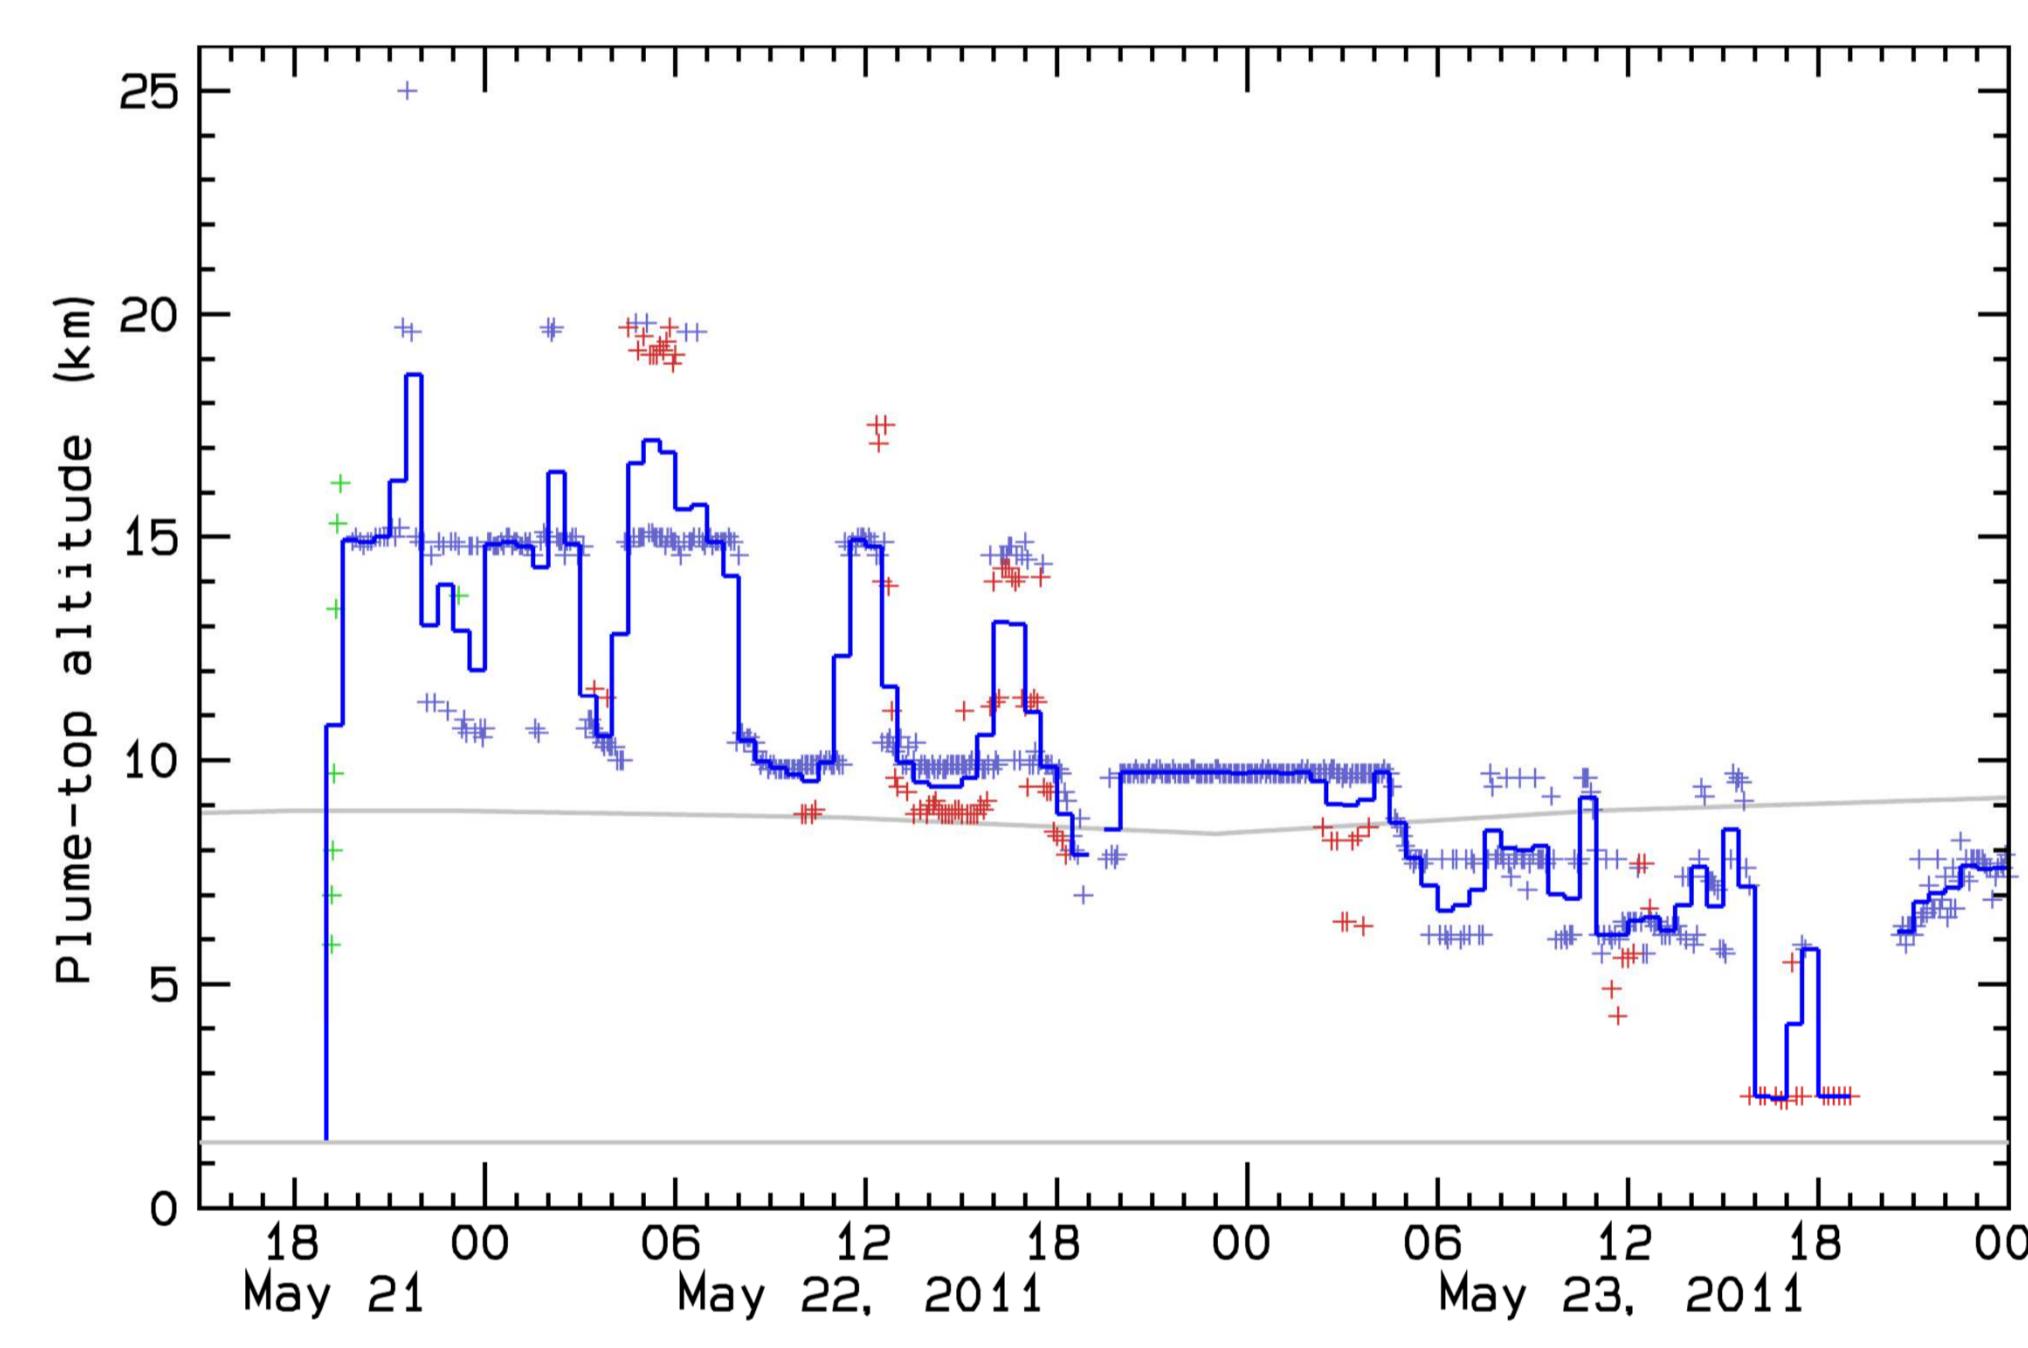

Grímsvötn 2011: Plume-top altitude – 30 min averages and individual estimates during the initial and most powerful 57 hours, 21–23 May 2011.

Table 2 Keflavík radar, SW-Iceland

| | |
|-------------------------------|---|
| Location | 64°01.54' N, 22°38.11' W (fixed position) |
| Type | Ericsson UBS 103 04 radar system |
| Operational since | January 1991; doppler since April 2010 |
| Operating frequency | 5.61 GHz, C-band |
| Wavelength | 5.3 cm |
| Peak transmitted power | ~250 kW |
| Maximum range | 480 km |
| TX type | Magnetron |
| RX type | Analog |
| Polarization | Linear horizontal |
| Signal Processor | UFC 108 14/8 |
| Data managing software | Rainbow®5 |
| Reflector diameter | 4.2 m |
| Height of antenna | 47 m above sea level |
| Pulse duration | 0.58±0.05 µs (doppler); 2.0±0.2 µs (refl.) |
| Pulse repetition frequency | 900/1200 Hz (0.6 µs); 250±2 Hz (2 µs) |
| Half-power beam width | 0.9° |
| Range resolution | 1 km (doppler); 2 km (reflectivity) (typical) |
| Actual gain of antenna | 44.9 dB |
| Minimum detectable signal | -114 dBm (0.6 µs); -109 dBm (2 µs) |
| Scanning speed | 1 - 6 rpm; 3 rpm (typical) |
| Elevation angles reflectivity | 0.5°, 0.9°, 1.3°, 2.4°, 3.5°, 4.5°, 6.0°, 8.0°, 10.0°, 15.0°, 25.0° & 40.0° (typical) |
| Elevation angles doppler | 0.5°, 1.3°, 2.4°, 5.0°, 7.0°, 10.0°, 15.0°, 20.0° & 30.0° (typical) |
| Refl. threshold (echo top) | -20 dBZ (typical) |

Table 3 Fljótsdalsheiði radar, E-Iceland

| | |
|-------------------------------|---|
| Location | 65°01.68' N, 15°02.29' W (fixed pos.) |
| Type | EEC SWR-250C(F) |
| Operational since | May 2012 |
| Operating frequency | 5.52 GHz, C-band |
| Wavelength | 5.4 cm |
| Peak transmitted power | ~250 kW |
| Maximum range | 480 km |
| TX type | Magnetron |
| RX type | Digital |
| Polarization | Linear horizontal |
| Signal Processor | IQ2 |
| Data managing software | EDGE V5.5 |
| Reflector diameter | 4.25 m |
| Height of antenna | 698 m above sea level |
| Pulse duration | 0.8 µs & 2 µs |
| Pulse repetition frequency | 250-934 Hz (0.8 µs); 250-300 Hz (2 µs) |
| Half-power beam width | 1° |
| Range resolution | 0.016-2.000 km; 0.25-0.50 km (typical) |
| Azimuthal resolution | 0.2°-1.2°; 0.4° (typical) |
| Minimum gain of antenna | 44 dB |
| Minimum detectable signal | -115 dBm (0.8 µs); -117 dBm (2 µs) |
| Angle position accuracy | < 0.1° |
| Scanning speed | 1 - 6 rpm; 2 rpm (typical) |
| Elevation angles reflectivity | 0.7°, 1.8°, 3.1°, 4.6°, 6.3°, 8.3°, 10.6°, 13.2°, 16.2°, 19.7°, 23.8°, 28.4°, 33.8° & 40.0° (typical) |
| Refl. threshold (echo top) | -20 dBZ (typical) |

Table 4 Huginn & Muninn mobile radars

| | |
|-------------------------------|---|
| Location | mobile |
| Type | Selex Gemtronik Meteor 50DX |
| Gross weight | 3500 kg |
| Operational since | Hu: June 2012 / Mu: February 2013 |
| Operating frequency | Hu: 9.375 GHz / Mu: 9.355 GHz, X-band |
| Wavelength | 3.2 cm |
| Peak transmitted power | ~65 kW |
| Maximum range | 120 km |
| TX type | Magnetron |
| RX type | Digital |
| Polarization | Horizontal and vertical |
| Signal Processor | GDRX |
| Data managing software | Rainbow®5 |
| Antenna type | XDP15, parabolic, prime focus reflector |
| Reflector diameter | 1.88 m |
| Height of antenna | 3 m above ground |
| Pulse duration | 0.5 µs, 1 µs & 2 µs |
| Pulse repetition frequency | 250 - 2000 Hz |
| Half-power beam width | 1.25° |
| Range resolution | 42.4 dB |
| Azimuthal resolution | Hu: H&V: -117 dBm Mu: H/V: -117/-119 dBm |
| Minimum gain of antenna | 0.03 - 2.00 km; 0.1 km (typical) |
| Minimum detectable signal | < 0.1° |
| Scanning speed | 1 - 6 rpm; 3 rpm (typical) |
| Elevation angles reflectivity | 0.7°, 1.8°, 3.1°, 4.6°, 6.3°, 8.3°, 10.6°, 13.2°, 16.2°, 19.7°, 23.8°, 28.4°, 33.8° & 40.0° (typical) |
| Refl. threshold (echo top) | -20 dBZ (typical) |